

DS103 Series

DOLPHIN THRU PANEL MOUNTED INFORM TAP

- › Dolphin Thru Panel Mounted InForm Tap
- › Manufactured from high-quality, highly durable 1.4401 (316) Marine grade stainless steel.
- › Self-monitoring analysis and recording technology (smart) allows the facilities Manager to connect point to point via the Dolphin InForm App when used with the optional Bluetooth Adaptor (Sold separately – Order product code 25148)
- › Infrared Touch Free Tap – for ultimate hygiene – prevents cross contamination – sensor mounted in end of spout
- › 55° Spout
- › Designed to be mounted thru an IPS panel.
- › Flow rate – 3.5 litres/minute with the standard fitted flow regulator (contained within NeoperlTT cache aerator)
- › Operating pressure: 0.5 bar minimum to 8.0 bar maximum
- › Other flow rates including 1.89 litres/minute available to special order – please enquire
- › Water supply: single inlet cold or pre-mixed – a TMV2 or TMV3 thermostatic mixing valve is recommended for premixed applications
- › Maximum operating water temperature - 65°C
- › Power supply
- › Nominal current: Less than 1mA (Less than 25mA with Bluetooth)
- › Nominal power: Less than 1W
- › Security time can be adjusted via the App – default 20 seconds (60 seconds max)
- › IP68 connector

DIAMETER
PROJECTION


28 MM
see below

PRODUCT CODES

- › **DS103.130.1** Dolphin Brushed Satin Stainless Steel Thru Panel Mounted InForm Tap 130mm projection
- › **DS103.180.1** Dolphin Brushed Satin Stainless Steel Thru Panel Mounted InForm Tap 180mm projection
- › **DS103.230.1** Dolphin Brushed Satin Stainless Steel Thru Panel Mounted InForm Tap 230mm projection
- › **DS103.280.1** Dolphin Brushed Satin Stainless Steel Thru Plate Mounted InForm Tap 280mm projection
- › **DS103.330.1** Dolphin Brushed Satin Stainless Steel Thru Plate Mounted InForm Tap 330mm projection
- › **DS103.130.2** Dolphin Mirror Polished Stainless Steel Thru Panel Mounted InForm Tap 130mm projection
- › **DS103.180.2** Dolphin Mirror Polished Stainless Steel Thru Panel Mounted InForm Tap 180mm projection
- › **DS103.230.2** Dolphin Mirror Polished Stainless Steel Thru Panel Mounted InForm Tap 230mm projection
- › **DS103.280.2** Dolphin Mirror Polish Stainless Steel Thru Plate Mounted InForm Tap 280mm projection
- › **DS103.330.2** Dolphin Mirror Polish Stainless Steel Thru Plate Mounted InForm Tap 330mm projection


OPTIONS

Flow Rate Curve

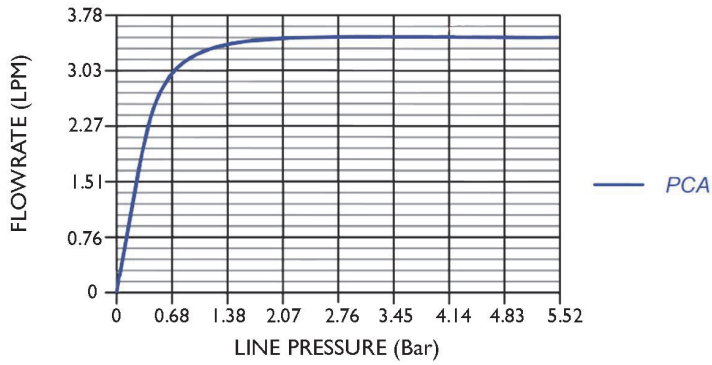

PCA® Perlator®
Faucet Aerator - 3.78 lpm max
 Pressure Compensating Tom Thumb® Size

Flow Rate Curve

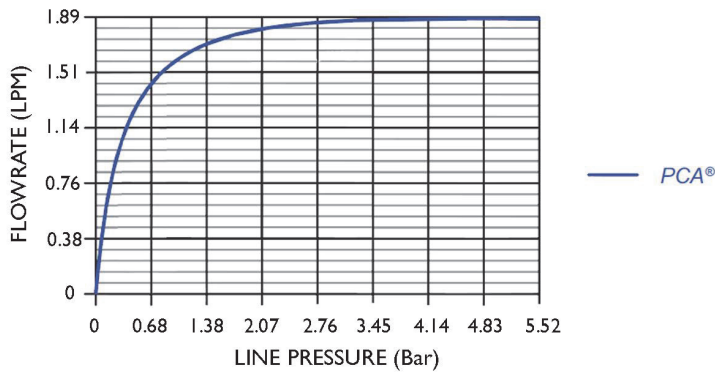

PCA® Perlator®
Laminar Stream - 1.89 lpm max
 Pressure Compensating Tom Thumb® Size

DS103.180.1 (Brushed Satin)



DS103.180.2 (Mirror Polished)



Available Finishes

- 1 Brushed Satin
- 2 Mirror Polished

Power Supply Options

- 25147 UK mains adaptor
- 25428 Euro mains adaptor
- 25240 Hardwire transformer
- 25241 Battery pack