DOLPHIN TALL MONOBLOC MIXER TAP

INSTALLATION AND MAINTENANCE GUIDE





DOLPHIN TALL MONOBLOC MIXER TAP

INSTALLATION AND MAINTENANCE GUIDE

PRE INSTALLATION

- > Before installation, please ensure that the following work conditions are adhered to:
 - > Water temperature between 0° 90°C
 - > Water pressure between 0.05MPa 1.0MPa. A pressure reducing valve is necessary if pressure exceeds 1.2MPa
 - > Avoid major pressure differences between hot and cold water supply
- > Flush pipes thoroughly before and after installation to ensure water supply is free of any debris
- Inspect tap fitting and debugged to its best. Do not attempt to disassemble fitting on your own
- > Use thread sealant tape (PRFE) on any screw joining connections and ensure all joints are tightened securely.

INSTALLATION STEPS


- An opeing hole of 35mm diameter is required on sink top or work top for installation of tap.
- 2. Slide the rubber O-ring (B) over the threaded tube and up to the base of the tap (A).
- 3. Insert the threaded tube through the hole of sink top or work top (C) and position the tap properly.
- 4. Slide the rubber O-Washer (E) over the threaded tube and up the underside of sink top or work top (C).
- 5. Screw the fixing bushing (F) up to the metal O-washer (E).
- 6. Connect the flexi hoses (G) to the extension tube on one end and the hot and cold water supply on the other end. Please ensure that the hot water supply goes through the hot flexi hose while the cold water goes though the cold flexi tube.

WARRANTY

- > Lifetime warranty on anti-rust
- > 5 year warranty on tap cartridge
- > 10 year warranty of manufacturing defects

CLEANING INSTRUCTIONS

- > Tap should not be cleaned with abrasive materials such as steel wool or scourers
- > Do not use any corrosive or abrasive cleaning agents containing acid or scouring agents

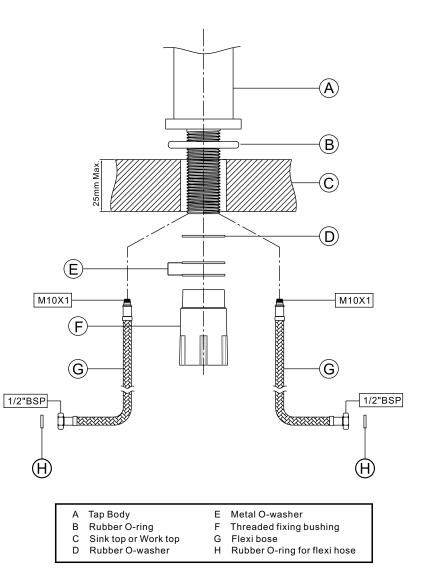

Dolphin Solutions Ltd Southpoint, Compass Park, Junction Road Bodiam, TN32 5BS, United Kingdom T +44 (0) 1424 202 224 info@dolphinsolutions.co.uk dolphinsolutions.co.uk

© Dolphin Solutions Ltd